



TV-F2400 U

SERVICE MANUAL

COLOR TELEVISION

- Replace this Service manual with "Revision Publishing" when it is issued.

aiwa

S/M Code No. 09-005-431-9T1

SIMPLE

DATA

ELECTRICAL MAIN PARTS LIST - 1/8

NOTE: The characters in the suffix column indicate the part usage.

U1M	XX.....	A.....	
		KANRI		
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
*	87-067-579-010		TAPPING SCREW, BVT2+3-8	A.....
*	87-067-619-010		BVT1+3-12	A.....
C	808	87-010-384-080	CAP, ELECT 100-25V	A.....
C	801	87-010-408-080	CAP, ELECT 47-50V
C	809	87-018-131-080	CAP, CER 1000P-50V	A.....
C	802	87-018-131-080	CAP, CER 1000P-50V	A.....
C	804	87-A10-474-090	CAP,PP 0.01-1.25K J PHS
C	807	87-A10-568-010	CAP,PP 1000P-630 J APH	A.....
C	805	87-A10-842-080	CAP,CER 470P-1K K R
C	805	87-A10-846-080	CAP,CER 3300P-1K K R	A.....
C	804	87-A11-308-090	CAP,M/P 0.033-630 J ECQF6 (ZH)	A.....
C	806	87-A12-287-090	CAP,E 390-400 M SMM
C	806	87-A12-298-090	CAP,E 820-200 M 25B SMH	A.....
C	814	87-010-260-080	CAP, ELECT 47-25V	A.....
C	815	87-010-260-080	CAP, ELECT 47-25V	A.....
C	817	87-010-398-090	CAP,E 2200-35V	A.....
C	816	87-010-405-080	CAP, ELECT 10-50V	A.....
C	810	87-018-129-080	CAP, CER 680P-50V	A.....
C	811	87-018-131-080	CAP, CER 1000P-50V	A.....
C	813	87-018-131-080	CAP, CER 1000P-50V	A.....
C	818	87-018-209-080	CAP, CER 0.1-50V	A.....
C	824	87-010-237-080	CAP, ELECT 1000-16V	A.....
C	829	87-010-384-080	CAP, ELECT 100-25V	A.....
C	820	87-010-405-080	CAP, ELECT 10-50V	A.....
C	821	87-010-405-080	CAP, ELECT 10-50V	A.....
C	826	87-010-976-080	CAP,CER 1000P-500 B	A.....
C	822	87-018-209-080	CAP, CER 0.1-50V	A.....
C	827	87-A12-290-080	CAP,CER 220P-2K J SL HR
C	838	87-010-397-010	CAP,1000-35	A.....
C	831	87-010-405-080	CAP, ELECT 10-50V	A.....
C	835	87-016-037-060	CAP,CER 1000P-2KB	A.....
C	834	87-A10-733-090	CAP,E 220-160 SK	A.....
C	835	87-A12-292-010	CAP,CER 330P-2K J SL HR
C	842	87-012-370-010	CAP,CER 3300P-250NS	A.....
C	845	87-012-370-010	CAP,CER 3300P-250NS	A.....
C	844	87-012-370-010	CAP,CER 3300P-250NS	A.....
C	843	87-012-370-010	CAP,CER 3300P-250NS	A.....
C	846	87-A10-207-080	CAP,TCS 0.01-50KBUP050	A.....
CN	807	82-481-649-010	PLUG,2P MINI (*)	A.....
CNA	801	8A-JE5-619-010	CONN ASSY,3P V MAIN-PS	A.....
CNA	803	8Z-JE5-636-010	CONN ASSY,2P PS-MAIN 5V	A.....
D	802	87-017-654-060	DIODE,GBU6J	A.....
D	803	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	805	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	801	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	807	87-A40-286-080	DIODE,RGP10JE-5025	A.....
D	808	87-A40-286-080	DIODE,RGP10JE-5025	A.....
D	809	87-A40-828-080	DIODE,AK 04	A.....
D	804	87-A40-856-080	DIODE,UF4007	A.....
D	817	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	816	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	815	87-A40-001-080	ZENER,MTZJ12C	A.....
D	821	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	826	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	825	87-A40-234-080	ZENER,MTZJ5.6A	A.....
D	827	87-A40-330-090	DIODE,UF3JL-6252
D	827	87-A40-354-090	DIODE,UF3GL-6251	A.....
D	823	87-A40-734-010	DIODE,FML-G12S	A.....
D	822	87-A40-825-090	DIODE,RN 1Z	A.....
D	832	87-A40-001-080	ZENER,MTZJ12C
D	831	87-A40-286-080	DIODE,RGP10JE-5025	A.....
D	830	87-A40-337-080	ZENER,MTZJ 6.8B	A.....
FB	804	87-003-320-080	F-BEAD,FBR07HA121NB	A.....
FB	807	87-003-320-080	F-BEAD,FBR07HA121NB	A.....
FB	803	87-003-320-080	F-BEAD,FBR07HA121NB	A.....
FB	802	87-003-320-080	F-BEAD,FBR07HA121NB	A.....
FB	805	87-003-320-080	F-BEAD,FBR07HA121NB	A.....
FB	806	87-003-320-080	F-BEAD,FBR07HA121NB	A.....
FB	801	87-003-320-080	F-BEAD,FBR07HA121NB	A.....
FR	801	87-A00-770-090	RES,FUSE 0.1-1W J RF1SL12.5	A.....
IC	803	87-001-536-010	IC,NJM78M05FA	A.....
IC	804	87-020-969-010	IC,NJM78M09FA	A.....
IC	805	87-A20-389-010	IC,NJM7809FA	A.....
IC	801	87-A21-344-010	IC,STR-F6656
IC	801	87-A21-468-010	IC,STR-F6626	A.....
IC	802	87-A21-491-010	IC,SE125N	A.....
L	801	87-A50-170-010	COIL,390UH RCH106	A.....
L	803	87-A50-176-080	COIL,33UH-PJ87	A.....
PR	803	87-A90-070-080	PROTECTOR,3.5A 251	A.....
PR	801	87-A90-090-080	PROTECTOR,1.5A 491SERIES 60V
PR	802	87-A90-195-080	PROTECTOR 7A 125V 49

ELECTRICAL MAIN PARTS LIST - 2/8

PR	802	87-A90-210-080	FUSE,7A 125V 251	A.....
PR	801	87-A90-409-080	FUSE,1.5A 125V A 251	A.....
PR	803	87-A90-473-080	PROTECTOR,3.5A 491SERIES 60V
PS	801	87-A90-717-010	P-COUPLER,PC123FY2	A.....
PT	801	8A-JE5-622-010	PT,U SW AJE-5	A.....
Q	806	87-026-463-080	TR,2SA933S (0.3W)	A.....
Q	802	87-A30-114-080	TR,2SD1207T
Q	801	89-318-155-080	TR,2SC1815 (0.4W)	A.....
Q	811	89-110-913-080	TR,2SA1091-O	A.....
R	802	87-A00-160-090	RES,M/F 33-2W J RSF(S)	A.....
R	805	87-A00-170-090	RES,M/F 82K-3W J RSF(S)	A.....
R	804	87-A00-332-090	RES,CEM 1-10W J RGC
R	803	87-A00-356-090	RES,M/F 22-2W J RSS2X	A.....
R	806	87-A00-380-090	RES,M/F 39K-3W J RSS H2	A.....
R	806	87-A00-382-090	RES,M/F 56K-3W J RSS H2
R	804	87-A00-633-090	RES,CEM 0.47-10W J RGC	A.....
R	801	87-A00-661-010	RES,CEM 27-2W J BGR2U	A.....
R	811	87-A00-646-090	RES,CEM 0.1-5W K RGC5	A.....
R	824	87-A00-315-090	RES,M/F 1K-1W J RSF(S)	A.....
R	833	87-A00-199-090	RES,M/F 12K-3W J RSF(S)	A.....
R	834	87-A00-223-090	RES,M/F 47K-2W J RSF(S)	A.....
R	844	87-A00-254-090	RES,M/F 0.68-2W J	A.....
R	848	87-A00-332-090	RES,CEM 1-10W J RGC
RY	801	87-A91-390-010	RELAY,AC12V G5PA-1-8	A.....
S	801	87-A91-410-010	SW,AC PUSH 1-1-1 ESB92SH1B	A.....
TH	801	87-A90-759-010	POS-THMS,PTH451C272BF300N270
TH	801	87-A91-579-010	POS-THMS,PTH451BG3R0Q140	A.....
C	714	87-010-221-080	CAP, ELECT 470-10V	A.....
C	737	87-018-134-080	CAPACITOR,TC-U 0.01-16	A.....
C	738	87-A10-307-080	CAP,M 0.1-50 J
CN	705	87-009-262-010	CONN,8P 52147 MXJ	A.....
CN	706	87-099-186-010	CONN,6P EH V WHT	A.....
CN	701	87-A60-628-010	CONN,11P V 2MM JMT	A.....
CN	707	87-A61-126-080	MALE, 1P TP42097	A.....
CNA	704	8A-JE5-617-010	CONN ASSY,6P V WHT TV-NK-2	A.....
J	702	87-A60-324-110	JACK,PIN 6P Y-W-R W/SW	A.....
Q	706	87-A30-065-080	TR,2SC2785FE	A.....
C	887	87-010-388-080	CAP ELECT 1000-25V SME	A.....
C	884	87-012-370-010	CAP,CER 3300P-250NS
C	885	87-012-370-010	CAP,CER 3300P-250NS
C	882	87-012-370-010	CAP,CER 3300P-250NS
C	886	87-012-370-010	CAP,CER 3300P-250NS
C	881	87-A10-688-090	CAP,M/P 0.22-275 K (B81133)	A.....
C	883	87-A10-688-090	CAP,M/P 0.22-275 K (B81133)	A.....
C	883	87-A11-353-010	CAP,M/P 0.22-275 M ECQUL
C	881	87-A11-353-010	CAP,M/P 0.22-275 M ECQUL
C	887	87-A12-302-080	CAP,E 1000-50 M SMG
CN	882	87-099-674-010	CONN,2P VA V	A.....
CN	884	87-A60-937-010	CONN,2P V VH	A.....
CN	883	87-A61-126-080	MALE, 1P TP42097	A.....
CN	885	87-A61-126-080	MALE, 1P TP42097	A.....
CN	881	87-A61-299-010	CONN,4P B 5-VB	A.....
D	885	87-A40-553-080	DIODE,1N4003 LES	A.....
D	884	87-A40-553-080	DIODE,1N4003 LES	A.....
D	882	87-A40-553-080	DIODE,1N4003 LES	A.....
D	883	87-A40-553-080	DIODE,1N4003 LES	A.....
D	881	87-A90-965-010	VRIS,TNR15G471K
D	881	8Z-JBH-606-010	VRIS,TNR15G271K	A.....
FC	882	87-033-213-080	CLAMP, FUSE	A.....
FC	881	87-033-213-080	CLAMP, FUSE	A.....
LF	881	87-A91-453-010	FLTR,LINE PLH10A7003R6P02B1	A.....
LF	882	87-A91-626-010	FLTR,LINE ELF21V018A	A.....
LF	881	87-A91-634-010	FLTR,LINE ELF18D450K
PT	882	8A-JE7-624-010	PT,NH ZTP3446 (STBY)
PT	881	8Z-JBH-614-010	PT,US TP8155T	A.....
R	881	87-023-102-080	RES,SD 4.7M 1/2W SF	A.....
R	881	87-A00-543-080	RES,SD 8.2M-1W J RCR60
		87-067-688-010	BVTT+3-6	A.....
C	407	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	406	87-010-260-080	CAP, ELECT 47-25V	A.....
C	401	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	409	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	405	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	408	87-010-405-080	CAP, ELECT 10-50V	A.....
C	402	87-A10-295-080	CAP,M 0.01-50 J	A.....
C	403	87-A10-295-080	CAP,M 0.01-50 J	A.....
C	404	87-A10-307-080	CAP,M 0.1-50 J	A.....
C	418	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	416	87-010-260-080	CAP, ELECT 47-25V	A.....
C	411	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	417	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	410	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	419	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	415	87-A10-293-080	CAP,M 6800P-50 J	A.....
C	413	87-A10-295-080	CAP,M 0.01-50 J	A.....
C	414	87-A10-305-080	CAP,M 0.068-50 J	A.....
C	428	87-010-189-080	C-CAP,S 8200P-50 B	A.....

ELECTRICAL MAIN PARTS LIST - 3/8

C	424	87-010-260-080	CAP, ELECT 47-25V	A.....
C	427	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	420	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	421	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	429	87-012-365-080	C-CAP,S 0.027-25VBK	A.....
C	422	87-A10-293-080	CAP,M 6800P-50 J	A.....
C	426	87-A10-295-080	CAP,M 0.01-50 J	A.....
C	425	87-A10-305-080	CAP,M 0.068-50 J	A.....
C	438	87-010-178-080	CHIP CAP 1000P	A.....
C	431	87-010-189-080	C-CAP,S 8200P-50 B	A.....
C	432	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	433	87-010-260-080	CAP, ELECT 47-25V	A.....
C	435	87-010-401-080	CAP, ELECT 1-50V	A.....
C	430	87-010-401-080	CAP, ELECT 1-50V	A.....
C	436	87-010-401-080	CAP, ELECT 1-50V	A.....
C	437	87-010-401-080	CAP, ELECT 1-50V	A.....
C	434	87-012-365-080	C-CAP,S 0.027-25VBK	A.....
C	439	87-A10-307-080	CAP,M 0.1-50 J	A.....
C	448	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	442	87-010-401-080	CAP, ELECT 1-50V	A.....
C	449	87-010-402-080	CAP, ELECT 2.2-50V	A.....
C	447	87-010-405-080	CAP, ELECT 10-50V	A.....
C	443	87-010-405-080	CAP, ELECT 10-50V	A.....
C	445	87-010-405-080	CAP, ELECT 10-50V	A.....
C	446	87-010-405-080	CAP, ELECT 10-50V	A.....
C	444	87-010-405-080	CAP, ELECT 10-50V	A.....
C	441	87-A10-307-080	CAP,M 0.1-50 J	A.....
C	440	87-A10-307-080	CAP,M 0.1-50 J	A.....
C	453	87-010-178-080	CHIP CAP 1000P	A.....
C	450	87-010-247-080	CAP, ELECT 100-50V	A.....
C	451	87-010-388-080	CAP ELECT 1000-25V SME	A.....
C	452	87-010-388-080	CAP ELECT 1000-25V SME	A.....
C	455	87-010-393-080	CAP, ELECT 100-35V	A.....
C	454	87-010-399-090	CAP,E 3300-35 SME	A.....
C	460	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	465	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	464	87-010-260-080	CAP, ELECT 47-25V	A.....
C	467	87-010-401-080	CAP, ELECT 1-50V	A.....
C	469	87-A10-295-080	CAP,M 0.01-50 J	A.....
C	468	87-A10-295-080	CAP,M 0.01-50 J	A.....
C	466	87-A10-295-080	CAP,M 0.01-50 J	A.....
C	470	87-010-154-080	CAP CHIP 10P	A.....
C	475	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	476	87-010-260-080	CAP, ELECT 47-25V	A.....
C	478	87-010-316-080	C-CAP,S 33P-50 CH	A.....
C	477	87-010-316-080	C-CAP,S 33P-50 CH	A.....
C	479	87-010-318-080	C-CAP,S 47P-50 CH	A.....
C	471	87-012-155-080	C-CAP 180P-50CH	A.....
C	474	87-A10-295-080	CAP,M 0.01-50 J	A.....
C	473	87-A10-295-080	CAP,M 0.01-50 J	A.....
C	472	87-A10-295-080	CAP,M 0.01-50 J	A.....
C	482	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	487	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	489	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	486	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	484	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	483	87-010-260-080	CAP, ELECT 47-25V	A.....
C	481	87-010-316-080	C-CAP,S 33P-50 CH	A.....
C	480	87-010-316-080	C-CAP,S 33P-50 CH	A.....
C	488	87-010-384-080	CAP, ELECT 100-25V	A.....
C	492	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	496	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	495	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	497	87-010-405-080	CAP, ELECT 10-50V	A.....
C	493	87-A10-307-080	CAP,M 0.1-50 J	A.....
C	494	87-A10-307-080	CAP,M 0.1-50 J	A.....
C	755	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	754	87-010-402-080	CAP, ELECT 2.2-50V	A.....
C	757	87-010-402-080	CAP, ELECT 2.2-50V	A.....
C	752	87-010-402-080	CAP, ELECT 2.2-50V	A.....
C	759	87-010-402-080	CAP, ELECT 2.2-50V	A.....
C	758	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	751	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	756	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	753	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	760	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	761	87-010-314-080	C-CAP,S 22P-50V	A.....
C	762	87-010-314-080	C-CAP,S 22P-50V	A.....
C	765	87-010-382-080	CAP, ELECT 22-25V	A.....
C	764	87-010-401-080	CAP, ELECT 1-50V	A.....
C	767	87-010-401-080	CAP, ELECT 1-50V	A.....
C	766	87-010-402-080	CAP, ELECT 2.2-50V	A.....
C	768	87-010-402-080	CAP, ELECT 2.2-50V	A.....
C	763	87-010-405-080	CAP, ELECT 10-50V	A.....
C	769	87-010-405-080	CAP, ELECT 10-50V	A.....
C	770	87-010-405-080	CAP, ELECT 10-50V	A.....
C	780	87-010-405-080	CAP, ELECT 10-50V	A.....

ELECTRICAL MAIN PARTS LIST - 4/8

C	781	87-010-405-080	CAP, ELECT 10-50V	A.....
CN	409	87-009-033-010	CONNECTOR, 5P	A.....
CN	401	87-009-314-010	CONN 8P 51048	A.....
CN	405	87-009-317-010	CONN,11P 51048	A.....
CN	404	87-049-469-010	CONN,4P V	A.....
CNA	402	8A-JE7-610-010	CONN ASSY,6P V WHT AU-MAIN	A.....
CNA	403	8A-JE7-611-010	CONN ASSY,11P V WHT AU-VD	A.....
CNA	408	8Z-JE7-663-010	CONN ASSY,2P COMB-NK	A.....
CNA	414	8A-JE7-626-010	CONN ASSY,1P AU-MAIN	A.....
D	405	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	401	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	402	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	403	87-A40-234-080	ZENER,MTZJ5.6A	A.....
DL	401	87-A91-598-010	DELAY LINE,350NS EQFK5-MT	A.....
FR	401	87-A00-478-090	RES,FUSE 2.2-1W J	A.....
FR	402	87-A00-478-090	RES,FUSE 2.2-1W J	A.....
IC	405	87-001-536-010	IC,NJM78M05FA	A.....
IC	402	87-A21-022-040	C-IC,BA3880FS	A.....
IC	401	87-A21-103-040	C-IC,MM1454XFB	A.....
IC	407	87-A21-219-010	IC,TC90A45P	A.....
IC	406	87-A21-220-010	IC,MM1311AD	A.....
IC	404	87-A21-283-010	IC,AN5277	A.....
IC	403	87-A21-554-010	IC,TA1216AN	A.....
J	401	87-A60-420-010	JACK,3.5 ST (MSC)	A.....
J	402	87-A61-296-010	JACK,PIN 3P +S ALL GOLD YKC22-	A.....
L	405	87-003-284-080	COIL,27UH LAL02	A.....
L	406	87-003-284-080	COIL,27UH LAL02	A.....
L	401	87-005-614-080	COIL 100UH LAV35 J	A.....
L	403	87-005-614-080	COIL 100UH LAV35 J	A.....
L	404	87-005-614-080	COIL 100UH LAV35 J	A.....
L	407	87-A50-555-010	COIL,100UH K 7212M-101K	A.....
Q	408	87-A30-062-080	C-TR,KRC104S	A.....
Q	403	89-110-372-080	TR,2SA1037(140MHZ 200MW)	A.....
Q	404	89-110-372-080	TR,2SA1037(140MHZ 200MW)	A.....
Q	409	89-324-122-080	TR,2SC2412K	A.....
Q	405	89-324-122-080	TR,2SC2412K	A.....
Q	402	89-324-122-080	TR,2SC2412K	A.....
Q	414	89-110-372-080	TR,2SA1037(140MHZ 200MW)	A.....
Q	416	89-110-372-080	TR,2SA1037(140MHZ 200MW)	A.....
Q	412	89-110-372-080	TR,2SA1037(140MHZ 200MW)	A.....
Q	417	89-110-372-080	TR,2SA1037(140MHZ 200MW)	A.....
Q	415	89-324-122-080	TR,2SC2412K	A.....
Q	413	89-324-122-080	TR,2SC2412K	A.....
Q	410	89-324-122-080	TR,2SC2412K	A.....
Q	411	89-324-122-080	TR,2SC2412K	A.....
Q	418	89-324-122-080	TR,2SC2412K	A.....
Q	752	89-324-122-080	TR,2SC2412K	A.....
Q	751	89-324-122-080	TR,2SC2412K	A.....
Q	756	89-324-122-080	TR,2SC2412K	A.....
R	432	87-A00-739-090	RES,M/F 1-7W K RSV7	A.....
R	448	87-A00-667-090	RES,M/F 680-2W J RSF(S)	A.....
R	447	87-A00-667-090	RES,M/F 680-2W J RSF(S)	A.....
W	401	8A-JE7-612-010	F-CABLE,8P 2.0 70MM	A.....
W	405	8A-JE7-613-010	F-CABLE,11P 2.0 70MM	A.....
C	7	87-010-248-080	CAP, ELECT 220-10V	A.....
C	5	87-010-401-080	CAP, ELECT 1-50V	A.....
C	9	87-010-401-080	CAP, ELECT 1-50V	A.....
C	1	87-010-405-080	CAP, ELECT 10-50V	A.....
C	8	87-018-123-080	CAP, CER 220P-50V	A.....
C	4	87-018-127-080	CAP, CER 470P-50V	A.....
C	3	87-018-134-080	CAPACITOR,TC-U 0.01-16	A.....
C	6	87-018-209-080	CAP, CER 0.1-50V	A.....
C	2	87-018-209-080	CAP, CER 0.1-50V	A.....
C	14	87-010-263-080	CAP, ELECT 100-10V	A.....
C	19	87-018-109-080	CAP, CER 22P-50V	A.....
C	18	87-018-109-080	CAP, CER 22P-50V	A.....
C	13	87-018-119-080	CAP, CER 100P-50V	A.....
C	12	87-018-119-080	CAP, CER 100P-50V	A.....
C	15	87-018-119-080	CAP, CER 100P-50V	A.....
C	17	87-018-128-080	CAP, CERA-SOL SS 560P	A.....
C	16	87-018-131-080	CAP, CER 1000P-50V	A.....
C	10	87-018-131-080	CAP, CER 1000P-50V	A.....
C	11	87-018-134-080	CAPACITOR,TC-U 0.01-16	A.....
C	22	87-018-109-080	CAP, CER 22P-50V	A.....
C	21	87-018-109-080	CAP, CER 22P-50V	A.....
C	20	87-018-119-080	CAP, CER 100P-50V	A.....
C	25	87-018-119-080	CAP, CER 100P-50V	A.....
C	23	87-018-123-080	CAP, CER 220P-50V	A.....
C	24	87-018-209-080	CAP, CER 0.1-50V	A.....
CN	1	87-009-195-010	CONN,5P B5BEH	A.....
D	4	87-017-932-080	ZENER,MTJ6.2B	A.....
D	5	87-017-932-080	ZENER,MTJ6.2B	A.....
D	8	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	9	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	1	87-070-110-010	LED,SLP-181B-51	A.....
FB	3	87-008-372-080	FILTER, EMI BL OIRNI	A.....
FB	5	87-008-372-080	FILTER, EMI BL OIRNI	A.....

ELECTRICAL MAIN PARTS LIST - 5/8

FB	6	87-008-372-080	FILTER, EMI BL OIRNI	A.....
FB	1	87-008-372-080	FILTER, EMI BL OIRNI	A.....
FB	2	87-008-372-080	FILTER, EMI BL OIRNI	A.....
FB	4	87-008-372-080	FILTER, EMI BL OIRNI	A.....
FB	7	87-008-372-080	FILTER, EMI BL OIRNI	A.....
HL	1	84-LB3-216-010	HLDR, LED	A.....
IC	4	87-A20-611-080	IC, M51943BSL-700A	A.....
IC	3	87-A21-378-010	IC, S-24C04BDP-1A	A.....
IC	2	87-A91-538-010	RCR UNIT, SBX1981-72P	A.....
IC	1	8A-JE7-623-010	IC, M37272MA-055SP	A.....
L	2	87-005-614-080	COIL 100UH LAV35 J	A.....
L	3	87-005-614-080	COIL 100UH LAV35 J	A.....
Q	2	87-026-269-080	TR, DTA114ES	A.....
Q	1	87-A30-065-080	TR, 2SC2785FE	A.....
Q	3	87-A30-065-080	TR, 2SC2785FE	A.....
Q	4	87-A30-065-080	TR, 2SC2785FE	A.....
Q	5	87-A30-066-080	TR, 2SA1175FE	A.....
S	2	87-A91-525-080	SW, TACT SKQNLA	A.....
S	6	87-A91-525-080	SW, TACT SKQNLA	A.....
S	3	87-A91-525-080	SW, TACT SKQNLA	A.....
S	5	87-A91-525-080	SW, TACT SKQNLA	A.....
S	4	87-A91-525-080	SW, TACT SKQNLA	A.....
S	7	87-A91-525-080	SW, TACT SKQNLA	A.....
X	1	87-A70-124-080	VIB, CER 8.0MHZ	A.....
C	104	87-010-248-080	CAP, ELECT 220-10V	A.....
C	101	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	105	87-018-134-080	CAPACITOR, TC-U 0.01-16	A.....
C	106	87-A10-207-080	CAP, TCS 0.01-50KBUP050	A.....
C	112	87-018-109-080	CAP, CER 22P-50V	A.....
C	113	87-018-109-080	CAP, CER 22P-50V	A.....
C	205	87-010-237-080	CAP, ELECT 1000-16V	A.....
C	209	87-010-385-080	CAP, ELECT 220-25V	A.....
C	203	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	207	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	208	87-018-134-080	CAPACITOR, TC-U 0.01-16	A.....
C	201	87-018-134-080	CAPACITOR, TC-U 0.01-16	A.....
C	204	87-018-134-080	CAPACITOR, TC-U 0.01-16	A.....
C	202	87-018-134-080	CAPACITOR, TC-U 0.01-16	A.....
C	206	87-A10-287-080	CAP, M 2200P-50 J	A.....
C	214	87-018-134-080	CAPACITOR, TC-U 0.01-16	A.....
C	212	87-A11-080-080	CAP, TC U 47P-50 J CH	A.....
C	211	87-A11-080-080	CAP, TC U 47P-50 J CH	A.....
C	210	87-A11-080-080	CAP, TC U 47P-50 J CH	A.....
C	213	87-A11-082-080	CAP, TC U 56P-50 J CH	A.....
C	229	87-018-149-080	CAP, TC-U 15P-50 CH	A.....
C	727	87-010-112-080	CAP, ELECT 100-16V	A.....
C	723	87-010-401-080	CAP, ELECT 1-50V	A.....
C	726	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	729	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	724	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	725	87-010-405-080	CAP, ELECT 10-50V	A.....
C	720	87-015-464-080	CAP, E 4.7-16 BP	A.....
C	728	87-015-464-080	CAP, E 4.7-16 BP	A.....
C	721	87-A10-292-080	CAP, M 5600P-50 J	A.....
C	722	87-A10-296-080	CAP, M 0.012-50 J	A.....
C	736	87-010-401-080	CAP, ELECT 1-50V	A.....
C	730	87-015-464-080	CAP, E 4.7-16 BP	A.....
C	734	87-015-464-080	CAP, E 4.7-16 BP	A.....
C	733	87-016-301-080	CAP, TN 3.3-16K DN	A.....
C	735	87-016-302-080	CAP, TN 10-16K DN	A.....
C	731	87-A10-288-080	CAP, M 2700P-50 J	A.....
CF	201	84-LB3-626-080	FLTR, TPS4.5MB2	A.....
CF	202	84-LB3-627-080	FLTR, SF5H 4.5MdB SIF	A.....
CNA	103	8A-JE5-627-010	CONN ASSY, 2P MAIN-S	A.....
CNA	101	8Z-JE5-637-010	CONN ASSY, 1P PS-MAIN	A.....
D	101	87-002-743-080	ZENER, MTZJ 33B	A.....
IC	102	87-001-536-010	IC, NJM78M05FA	A.....
IC	701	8Z-JBH-605-010	IC, CXA2104S	A.....
L	101	87-005-614-080	COIL 100UH LAV35 J	A.....
L	208	87-003-143-080	COIL 4.7 UH	A.....
L	207	87-003-147-080	COIL, 22UH	A.....
L	204	87-003-282-080	COIL, 12UH	A.....
L	203	87-005-612-080	COIL, 68UH J LAV35	A.....
L	206	87-005-614-080	COIL 100UH LAV35 J	A.....
L	205	8Z-JBH-610-010	COIL, PIF-SQ57EL349A 45.75MHZ	A.....
L	201	8Z-JBR-612-010	COIL, SIF 4.5MHZ 504BN	A.....
L	701	87-005-614-080	COIL 100UH LAV35 J	A.....
Q	202	87-A30-065-080	TR, 2SC2785FE	A.....
Q	201	87-A30-065-080	TR, 2SC2785FE	A.....
R	723	87-A00-130-080	RES, M/F 62K-1/6W F	A.....
SWF	201	8Z-JBH-633-010	FLTR, SAW M1969-US	A.....
TU	101	8Z-JBE-610-010	TU UNIT, USA ENV56D74G3	A.....
C	308	87-010-401-080	CAP, ELECT 1-50V	A.....
C	301	87-010-401-080	CAP, ELECT 1-50V	A.....
C	306	87-010-405-080	CAP, ELECT 10-50V	A.....
C	305	87-018-126-080	CAP, TC-U 390P-50 B	A.....
C	302	87-018-134-080	CAPACITOR, TC-U 0.01-16	A.....

ELECTRICAL MAIN PARTS LIST - 6/8

C	309	87-018-147-080	CAP,TC-U 10P-50 CH	A.....
C	307	87-A10-299-080	CAP,M 0.022-50 J	A.....
C	319	87-010-237-080	CAP, ELECT 1000-16V	A.....
C	317	87-010-402-080	CAP, ELECT 2.2-50V	A.....
C	315	87-018-123-080	CAP, CER 220P-50V	A.....
C	318	87-018-134-080	CAPACITOR,TC-U 0.01-16	A.....
C	314	87-018-134-080	CAPACITOR,TC-U 0.01-16	A.....
C	313	87-018-209-080	CAP, CER 0.1-50V	A.....
C	311	87-018-209-080	CAP, CER 0.1-50V	A.....
C	312	87-018-209-080	CAP, CER 0.1-50V	A.....
C	316	87-A10-378-080	CAP,E 2.2-50 K SH	A.....
C	321	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	328	87-010-405-080	CAP, ELECT 10-50V	A.....
C	323	87-016-280-080	CAP,E 3.3-50 M BP SME	A.....
C	327	87-018-134-080	CAPACITOR,TC-U 0.01-16	A.....
C	324	87-018-134-080	CAPACITOR,TC-U 0.01-16	A.....
C	325	87-018-134-080	CAPACITOR,TC-U 0.01-16	A.....
C	329	87-018-134-080	CAPACITOR,TC-U 0.01-16	A.....
C	322	87-A10-295-080	CAP,M 0.01-50 J	A.....
C	326	87-A10-307-080	CAP,M 0.1-50 J	A.....
C	330	87-010-401-080	CAP, ELECT 1-50V	A.....
C	338	87-010-405-080	CAP, ELECT 10-50V	A.....
C	331	87-010-544-080	CAP, ELECT 0.1-50V	A.....
C	335	87-015-997-010	CAP, ELECT 2200UF-16V	A.....
C	337	87-018-130-080	CAP,TC-U 820P-50 B	A.....
C	339	87-018-134-080	CAPACITOR,TC-U 0.01-16	A.....
C	332	87-018-134-080	CAPACITOR,TC-U 0.01-16	A.....
C	336	87-018-134-080	CAPACITOR,TC-U 0.01-16	A.....
C	333	87-018-134-080	CAPACITOR,TC-U 0.01-16	A.....
C	334	87-018-209-080	CAP, CER 0.1-50V	A.....
C	340	87-018-118-080	CAP,TC-U 82P-50 B	A.....
C	341	87-018-118-080	CAP,TC-U 82P-50 B	A.....
C	342	87-018-150-080	CAP,TC-U 18P-50 CH	A.....
C	343	87-A10-307-080	CAP,M 0.1-50 J	A.....
C	344	87-A10-307-080	CAP,M 0.1-50 J	A.....
D	302	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	301	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	303	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	304	87-A40-235-080	ZENER,MTZJ9.1C	A.....
D	309	87-A40-235-080	ZENER,MTZJ9.1C	A.....
D	306	87-A40-286-080	DIODE,RGP10JE-5025	A.....
D	308	87-A40-348-080	ZENER,MTZJ3.3A	A.....
D	305	87-A40-690-080	ZENER,MTZJ11B	A.....
D	313	87-A40-235-080	ZENER,MTZJ9.1C	A.....
D	311	87-A40-235-080	ZENER,MTZJ9.1C	A.....
D	310	87-A40-235-080	ZENER,MTZJ9.1C	A.....
FB	301	87-003-320-080	F-BEAD,FBR07HA121NB	A.....
IC	301	8Z-JBJ-605-010	IC,TA1268N	A.....
L	301	87-003-097-080	COIL,1UH	A.....
L	304	87-003-282-080	COIL,12UH	A.....
L	303	87-005-614-080	COIL 100UH LAV35 J	A.....
L	302	87-005-614-080	COIL 100UH LAV35 J	A.....
Q	307	87-026-218-080	TR,DTC144ES (0.2W)	A.....
Q	306	87-026-219-080	TR,DTA144ES (0.3W)	A.....
Q	301	87-A30-065-080	TR,2SC2785FE	A.....
Q	305	87-A30-065-080	TR,2SC2785FE	A.....
Q	303	87-A30-065-080	TR,2SC2785FE	A.....
Q	304	87-A30-065-080	TR,2SC2785FE	A.....
Q	309	87-A30-066-080	TR,2SA1175FE	A.....
Q	310	87-026-218-080	TR,DTC144ES (0.2W)	A.....
Q	311	87-A30-066-080	TR,2SA1175FE	A.....
R	315	87-025-380-080	RES,M/F 15K-1/6W F	A.....
R	316	87-025-427-080	RES,M/F 27K-1/6W F	A.....
R	326	87-025-426-080	RESISTOR, M/F 1/6W 22K	A.....
X	302	87-030-327-010	VIB,CER CSB503F30	A.....
X	301	87-A70-007-080	VIB,XTAL 3.58MHZ AQC-1001	A.....
		87-067-579-010	TAPPING SCREW, BVT2+3-8	A.....
		87-067-641-010	UTT2+3-8 (W/O SLOT)BL	A.....
C	907	87-010-235-080	CAP,E 470-16 SME	A.....
C	906	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	901	87-010-405-080	CAP, ELECT 10-50V	A.....
C	903	87-010-405-080	CAP, ELECT 10-50V	A.....
C	902	87-010-968-080	CAP,CER 680P-2K K B	A.....
C	908	87-A11-108-080	CAP,TC U 680P-50 J CH	A.....
C	909	87-A11-110-080	CAP,TC U 820P-50 J CH	A.....
C	915	87-010-260-080	CAP, ELECT 47-25V	A.....
C	917	87-010-970-090	CAP,CER 4700P-2K B F	A.....
C	916	87-018-134-080	CAPACITOR,TC-U 0.01-16	A.....
C	914	87-A10-052-080	CAP,E 2.2-250	A.....
C	911	87-A11-106-080	CAP,TC U 560P-50 J CH	A.....
C	912	87-A11-106-080	CAP,TC U 560P-50 J CH	A.....
C	913	87-A11-106-080	CAP,TC U 560P-50 J CH	A.....
C	910	87-A11-108-080	CAP,TC U 680P-50 J CH	A.....
C	951	87-010-381-080	CAP, ELECT 330-16V	A.....
C	956	87-010-405-080	CAP, ELECT 10-50V	A.....
C	955	87-010-405-080	CAP, ELECT 10-50V	A.....
C	954	87-010-405-080	CAP, ELECT 10-50V	A.....

ELECTRICAL MAIN PARTS LIST - 7/8

C	952	87-018-114-080	CAP, CERA-SOL SS 39P	A.....
C	958	87-018-119-080	CAP, CER 100P-50V	A.....
C	953	87-018-122-080	CAP 180P-50 B	A.....
C	957	87-018-122-080	CAP 180P-50 B	A.....
C	959	87-A10-050-010	CAP, CER 4700P-500	A.....
C	968	87-010-221-080	CAP, ELECT 470-10V	A.....
C	960	87-010-221-080	CAP, ELECT 470-10V	A.....
C	965	87-010-963-080	CAP, E 2.2-160 SME	A.....
C	963	87-A10-283-080	CAP, M 1000P-50 J	A.....
C	964	87-A10-283-080	CAP, M 1000P-50 J	A.....
C	967	87-A10-303-080	CAP, M 0.047-50 J	A.....
C	962	87-A12-010-080	CAP, M/P 0.047-250 J ECQE2	A.....
C	966	87-A12-014-080	CAP, M/P 0.1-250 J ECQE2	A.....
C	961	87-A12-168-080	CAP, E 33-160 M SMG	A.....
CN	901	87-009-034-010	CONN, 6P PH V	A.....
CN	902	87-009-195-010	CONN, 5P B5BEH	A.....
CN	904	87-A61-060-080	CONN, 1P V RED TP00706	A.....
CN	903	87-A61-126-080	MALE, 1P TP42097	A.....
CN	951	87-009-030-010	CONNECTOR 2P PH M	A.....
CN	952	87-099-043-010	CONN 2P EH	A.....
D	909	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	901	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	907	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	903	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	908	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	905	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	904	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	906	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	902	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	910	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	954	87-017-650-080	DIODE, 1SS119	A.....
D	951	87-017-650-080	DIODE, 1SS119	A.....
D	953	87-017-650-080	DIODE, 1SS119	A.....
D	952	87-017-650-080	DIODE, 1SS119	A.....
D	955	87-017-650-080	DIODE, 1SS119	A.....
D	957	87-A40-503-080	ZENER, MTZJ39B	A.....
D	956	87-A40-503-080	ZENER, MTZJ39B	A.....
L	902	87-005-608-080	COIL, 33UH J LAV35	A.....
L	901	87-005-608-080	COIL, 33UH J LAV35	A.....
L	903	87-005-608-080	COIL, 33UH J LAV35	A.....
L	952	87-005-481-080	COIL, 47UH J FLR50	A.....
L	951	87-005-482-080	COIL, 56UH FLR50 J	A.....
Q	907	87-A30-065-080	TR, 2SC2785FE	A.....
Q	906	87-A30-065-080	TR, 2SC2785FE	A.....
Q	905	87-A30-065-080	TR, 2SC2785FE	A.....
Q	904	87-A30-065-080	TR, 2SC2785FE	A.....
Q	908	87-A30-066-080	TR, 2SA1175FE	A.....
Q	902	87-A30-344-010	TR, 2SC5147D	A.....
Q	903	87-A30-344-010	TR, 2SC5147D	A.....
Q	901	87-A30-344-010	TR, 2SC5147D	A.....
Q	951	87-026-462-080	TR, 2SC1740 S (RS 0.3W)	A.....
Q	954	87-026-462-080	TR, 2SC1740 S (RS 0.3W)	A.....
Q	953	87-026-462-080	TR, 2SC1740 S (RS 0.3W)	A.....
Q	952	87-026-463-080	TR, 2SA933S (0.3W)	A.....
Q	956	89-118-370-010	TR, 2SA1837	A.....
Q	957	89-347-930-010	TR, 2SC4793	A.....
Q	955	89-407-742-080	TR, 2SD774	A.....
R	903	87-A00-242-090	RES, M/F 8.2K-3W J RS	A.....
R	902	87-A00-242-090	RES, M/F 8.2K-3W J RS	A.....
R	901	87-A00-242-090	RES, M/F 8.2K-3W J RS	A.....
R	968	87-022-382-090	RES, M/O 120-2W J	A.....
R	969	87-A00-638-080	RES, M/F 47-1/2W J SPR	A.....
R	974	87-022-556-090	RES, M/O 180-3W J	A.....
R	977	87-A00-634-080	RES, M/F 2.7-1/4W J SPR	A.....
R	970	87-A00-634-080	RES, M/F 2.7-1/4W J SPR	A.....
R	978	87-A00-635-080	RES, M/F 47-1/4W J SPR	A.....
R	976	87-A00-636-080	RES, M/F 560-1/4W J SPR	A.....
R	971	87-A00-636-080	RES, M/F 560-1/4W J SPR	A.....
R	973	87-A00-637-080	RES, M/F 1K-1/4W J SPR	A.....
SO	901	8A-JE7-670-010	SOCKET, CRT 11P HPS1521-013411	A.....
		87-067-579-010	TAPPING SCREW, BVT2+3-8	A.....
		87-067-641-010	UTT2+3-8 (W/O SLOT) BL	A.....
		87-067-680-010	BVI T3+3-10	A.....
		87-067-758-010	BVT2+3-12 W/O SLOT	A.....
		8Z-JE5-202-010	HLDR, FBT-25	A.....
C	504	87-010-393-080	CAP, ELECT 100-35V	A.....
C	508	87-010-398-090	CAP, E 2200-35V	A.....
C	501	87-010-405-080	CAP, ELECT 10-50V	A.....
C	505	87-018-131-080	CAP, CER 1000P-50V	A.....
C	509	87-A11-245-080	CAP, M/P 0.1-100 J TF-ECQV	A.....
C	510	87-010-405-080	CAP, ELECT 10-50V	A.....
C	608	87-A10-833-010	CAP, CER 1000P-2K K R LONG	A.....
C	609	87-A11-278-090	CAP, M/P 0.47-250 J ECWF(SR)	A.....
C	607	87-A11-999-090	CAP, M/P 0.012-800 H ECWH(V)	A.....
C	605	87-A12-020-090	CAP, M/P 0.013-1.6K H ECWH(VR)	A.....
C	611	87-010-963-080	CAP, E 2.2-160 SME	A.....
C	614	87-010-976-080	CAP, CER 1000P-500 B	A.....

ELECTRICAL MAIN PARTS LIST - 8/8

C	612	87-010-976-080	CAP,CER 1000P-500 B	A.....
C	613	87-016-373-080	CAP,E 10-250	A.....
C	618	87-A10-307-080	CAP,M 0.1-50 J	A.....
C	610	87-A10-833-010	CAP,CER 1000P-2K K R LONG	A.....
C	616	87-A10-843-080	CAP,CER 680P-1K K R	A.....
C	615	87-A10-843-080	CAP,CER 680P-1K K R	A.....
C	619	87-A11-987-080	CAP,CER 6800P-250 K R HR	A.....
C	617	87-A12-082-090	CAP,E 1000-35 SMG	A.....
C	620	87-010-395-080	CAP,E 330-35 SME	A.....
C	626	87-010-405-080	CAP, ELECT 10-50V	A.....
C	627	87-010-975-080	CAP,CER 330P-500 B	A.....
C	624	87-010-975-080	CAP,CER 330P-500 B	A.....
C	621	87-018-131-080	CAP, CER 1000P-50V	A.....
C	629	87-A10-469-080	CAP,CER 2200P-500 K B DD10	A.....
C	622	87-A11-124-080	CAP,TC U 2200P-50 K B	A.....
C	623	87-A12-171-080	CAP,E 4.7-50 K SH	A.....
C	631	87-010-263-080	CAP, ELECT 100-10V	A.....
C	630	87-010-405-080	CAP, ELECT 10-50V	A.....
C	655	87-A11-354-090	CAP,E 100-160 M SMG	A.....
CN	601	87-099-762-010	CONN,5P TBL-P V BOSS	A.....
CNA	602	8Z-JE5-632-010	CONN ASSY,5P V WHT TV-NK-1	A.....
CNA	604	8Z-JE5-638-010	CONN ASSY,1P FBT-PS	A.....
D	502	87-070-092-080	DIODE,S5566B	A.....
D	501	87-A40-318-080	ZENER,RM26 V1	A.....
D	609	87-017-593-090	DIODE,RGP15J	A.....
D	603	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	605	87-A40-001-080	ZENER,MTZJ12C	A.....
D	604	87-A40-286-080	DIODE,RGP10JE-5025	A.....
D	602	87-A40-286-080	DIODE,RGP10JE-5025	A.....
D	601	87-A40-735-090	DIODE,ERC06-15	A.....
D	613	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	615	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	614	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	611	87-A40-286-080	DIODE,RGP10JE-5025	A.....
FB	601	87-003-223-080	FERRITE BEAD BL02RN2	A.....
FB	602	87-003-223-080	FERRITE BEAD BL02RN2	A.....
FR	601	87-A00-477-090	RES,FUSE 1.8-1W J	A.....
FR	608	87-A00-628-090	RES,FUSE 0.68-1W J RF 1SL12.5	A.....
FR	610	87-A00-628-090	RES,FUSE 0.68-1W J RF 1SL12.5	A.....
IC	501	87-A21-456-010	IC,LA7833	A.....
IC	601	87-070-417-010	IC,NJM4558 DD	A.....
L	607	87-A50-541-010	COIL,1MH 1.5AP-P	A.....
L	604	87-A50-607-080	COIL,3.9MH K LHL10	A.....
L	606	8Z-JE5-621-010	COIL,HLC ZJE-5	A.....
PR	601	87-A90-429-080	FUSE,1.25A 125V A 251	A.....
PR	601	87-A90-764-080	PROTECTOR,1.25A 60V491	A.....
Q	604	87-A30-065-080	TR,2SC2785FE	A.....
Q	603	87-A30-363-010	TR,2SD2531	A.....
Q	602	87-A30-366-010	TR,2SD2580	A.....
Q	605	89-110-154-080	TR,2SA1015Y	A.....
Q	601	89-324-820-080	TR,2SC2482	A.....
R	506	87-A00-143-090	RES,M/F 1.0-1W J RSF(S)	A.....
R	508	87-A00-653-090	RES,M/F 270-1W J RSF(S)	A.....
R	604	87-A00-565-090	RES,M/F 1.2K-7W J RSU7	A.....
R	612	87-A00-629-090	RES,M/F 5.6-1W J RSF(S)	A.....
R	626	87-A00-676-090	RES,M/F 100-7W J RSV7	A.....
SFR	501	87-024-429-080	SFR,1K RH063EC	A.....
SFR	602	87-024-429-080	SFR,1K RH063EC	A.....
SFR	601	87-024-434-080	SFR,22K RH063EC	A.....
SFR	603	87-A90-385-080	SFR,22K H DIA6 EVM	A.....
T	602	85-JT2-653-010	PT,HDT-TV141-2	A.....
T	601	8Z-JE5-606-010	FBT,D NX-4523 ZJE-5	A.....
C	772	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	771	87-010-322-080	C-CAP,S 100P-50 CH	A.....
CN	771	87-009-345-010	CONN,2P PH H	A.....
CNA	771	8Z-JE5-631-010	CONN ASSY,5P S-JK	A.....
J	771	87-A61-174-010	JACK,Y/CYKF51-5558	A.....
		8A-JE5-616-010	AC CORD ASSY,USA LK	A.....
		8A-JE5-630-010	AC CORD ASSY,NH BLK AJE	A.....
		8A-JE7-620-010	CONN ASSY,2P VM-NK	A.....
		8Z-JE5-607-010	CONN ASSY,1P CRT-GND	A.....
		8Z-JE5-625-010	COIL,DGC 25-F	A.....
		8Z-JE5-640-010	CONN ASSY,4P SP-25	A.....
		8Z-JE7-609-010	ANODE-CAP,ZJE-7	A.....
		8Z-JE7-610-010	HV-CABLE, 2P ZJE-7FOC-SCR	A.....
*		87-A90-332-010	HLDR,SF-2001 HV CABLE	A.....
F	881	87-035-459-010	FUSE,5A 250V	A.....
F	881	87-A91-106-010	FUSE,5A 125V T SER233	A.....
SP	401	8Z-JB3-620-010	SPKR,6*12 8OHM 15W	A.....
SP	402	8Z-JB3-620-010	SPKR,6*12 8OHM 15W	A.....
V	0	8A-JE5-607-010	CRT,A60LST196(0.45)	A.....
V	0	8A-JE5-608-010	CRT,A60LST196(0.2)	A.....

MECHANICAL PARTS LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.


U1M	XX.....	A.....	
		KANRI		
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	8A-JE5-002-010		CABI,REAR U	A.....
	8A-JE5-003-010		PANEL,MAIN U	A.....
	8A-JE5-004-010		PANEL,REAR U	A.....
	8A-JE5-006-010		CABI,FR U ASSY	A.....
	8A-JE5-007-010		PANEL,MAIN NH
	8A-JE5-009-010		PANEL,REAR NH
	8A-JE5-012-010		CABI,FR NH ASSY
	8A-JE7-003-010		KEY,MAIN 3	A.....
	8A-JE7-004-010		BTN,POWER 3	A.....
	8A-JEH-004-010		BTN,POWER 2
	8Z-JE5-002-010		CABI,REAR
	8Z-JE7-003-010		KEY,MAIN
	8Z-JE7-005-010		LENS,LED	A.....
	8Z-JE7-006-010		LENS,RC	A.....
	8Z-JE7-008-010		BADGE,AIWA ST 52.5	A.....
	83-JT1-217-010		SPR-E,EARTH	A.....
	8Z-JE5-205-110		HLDR,PWB	A.....
	86-LBB-206-010		S-SCREW,ASSY TV5-40 W20	A.....
	87-067-680-010		BVI T3+3-10	A.....
	87-067-690-010		TAPPING SCREW, BVIT3+3-12	A.....
	87-067-758-010		BVT2+3-12 W/O SLOT	A.....
	87-067-761-010		TAPPING SCREW, BVT2+3-10	A.....
	87-067-822-010		BVT2+3-20 W/O SLOT	A.....
	87-067-844-010		BVT2+4-16 BLK	A.....
	87-078-070-010		BVIT3B+4-12	A.....
	87-067-688-010		BVTT+3-6	A.....
W	401		8A-JE7-612-010	F-CABLE,8P 2.0 70MM
W	405		8A-JE7-613-010	F-CABLE,11P 2.0 70MM
			87-067-579-010	TAPPING SCREW, BVT2+3-8
			87-067-641-010	UTT2+3-8 (W/O SLOT) BL
			87-067-579-010	TAPPING SCREW, BVT2+3-8
			87-067-641-010	UTT2+3-8 (W/O SLOT) BL
			87-067-680-010	BVI T3+3-10
			87-067-758-010	BVT2+3-12 W/O SLOT
			8Z-JE5-202-010	HLDR,FBT-25
			8A-JE5-616-010	AC CORD ASSY,USA LK
			8A-JE5-630-010	AC CORD ASSY,NH BLK AJE
			8A-JE7-620-010	CONN ASSY,2P VM-NK
			8Z-JE5-607-010	CONN ASSY,1P CRT-GND
			8Z-JE5-625-010	COIL,DGC 25-F
			8Z-JE5-640-010	CONN ASSY,4P SP-25
			8Z-JE7-609-010	ANODE-CAP,ZJE-7
			8Z-JE7-610-010	HV-CABLE, 2P ZJE-7FOC-SCR

ACCESSORIES / PACKAGE LIST - 1/1


NOTE: The characters in the suffix column indicate the part usage.

U1M	XX.....	A.....
		KANRI	
REF.NO	PARTS NO.	NO.	DESCRIPTION SUFFIX
	8A-JE5-901-010	IB,U (ESF)	-F2400/ 2000 A.....
	8A-JE5-904-010	IB,NH (ES)	-F2500/ 2100
	87-B30-274-010	BAT,R6P	ATC A.....
	87-B30-311-010	ADAPTOR,300	75 TSN-02 A.....
	8A-JE7-951-010	RC UNIT,RC-ZVT24	A.....
	8A-JE7-955-010	RC UNIT,RC-AVT01


SCHEMATIC DIAGRAM - 1 (MAIN)

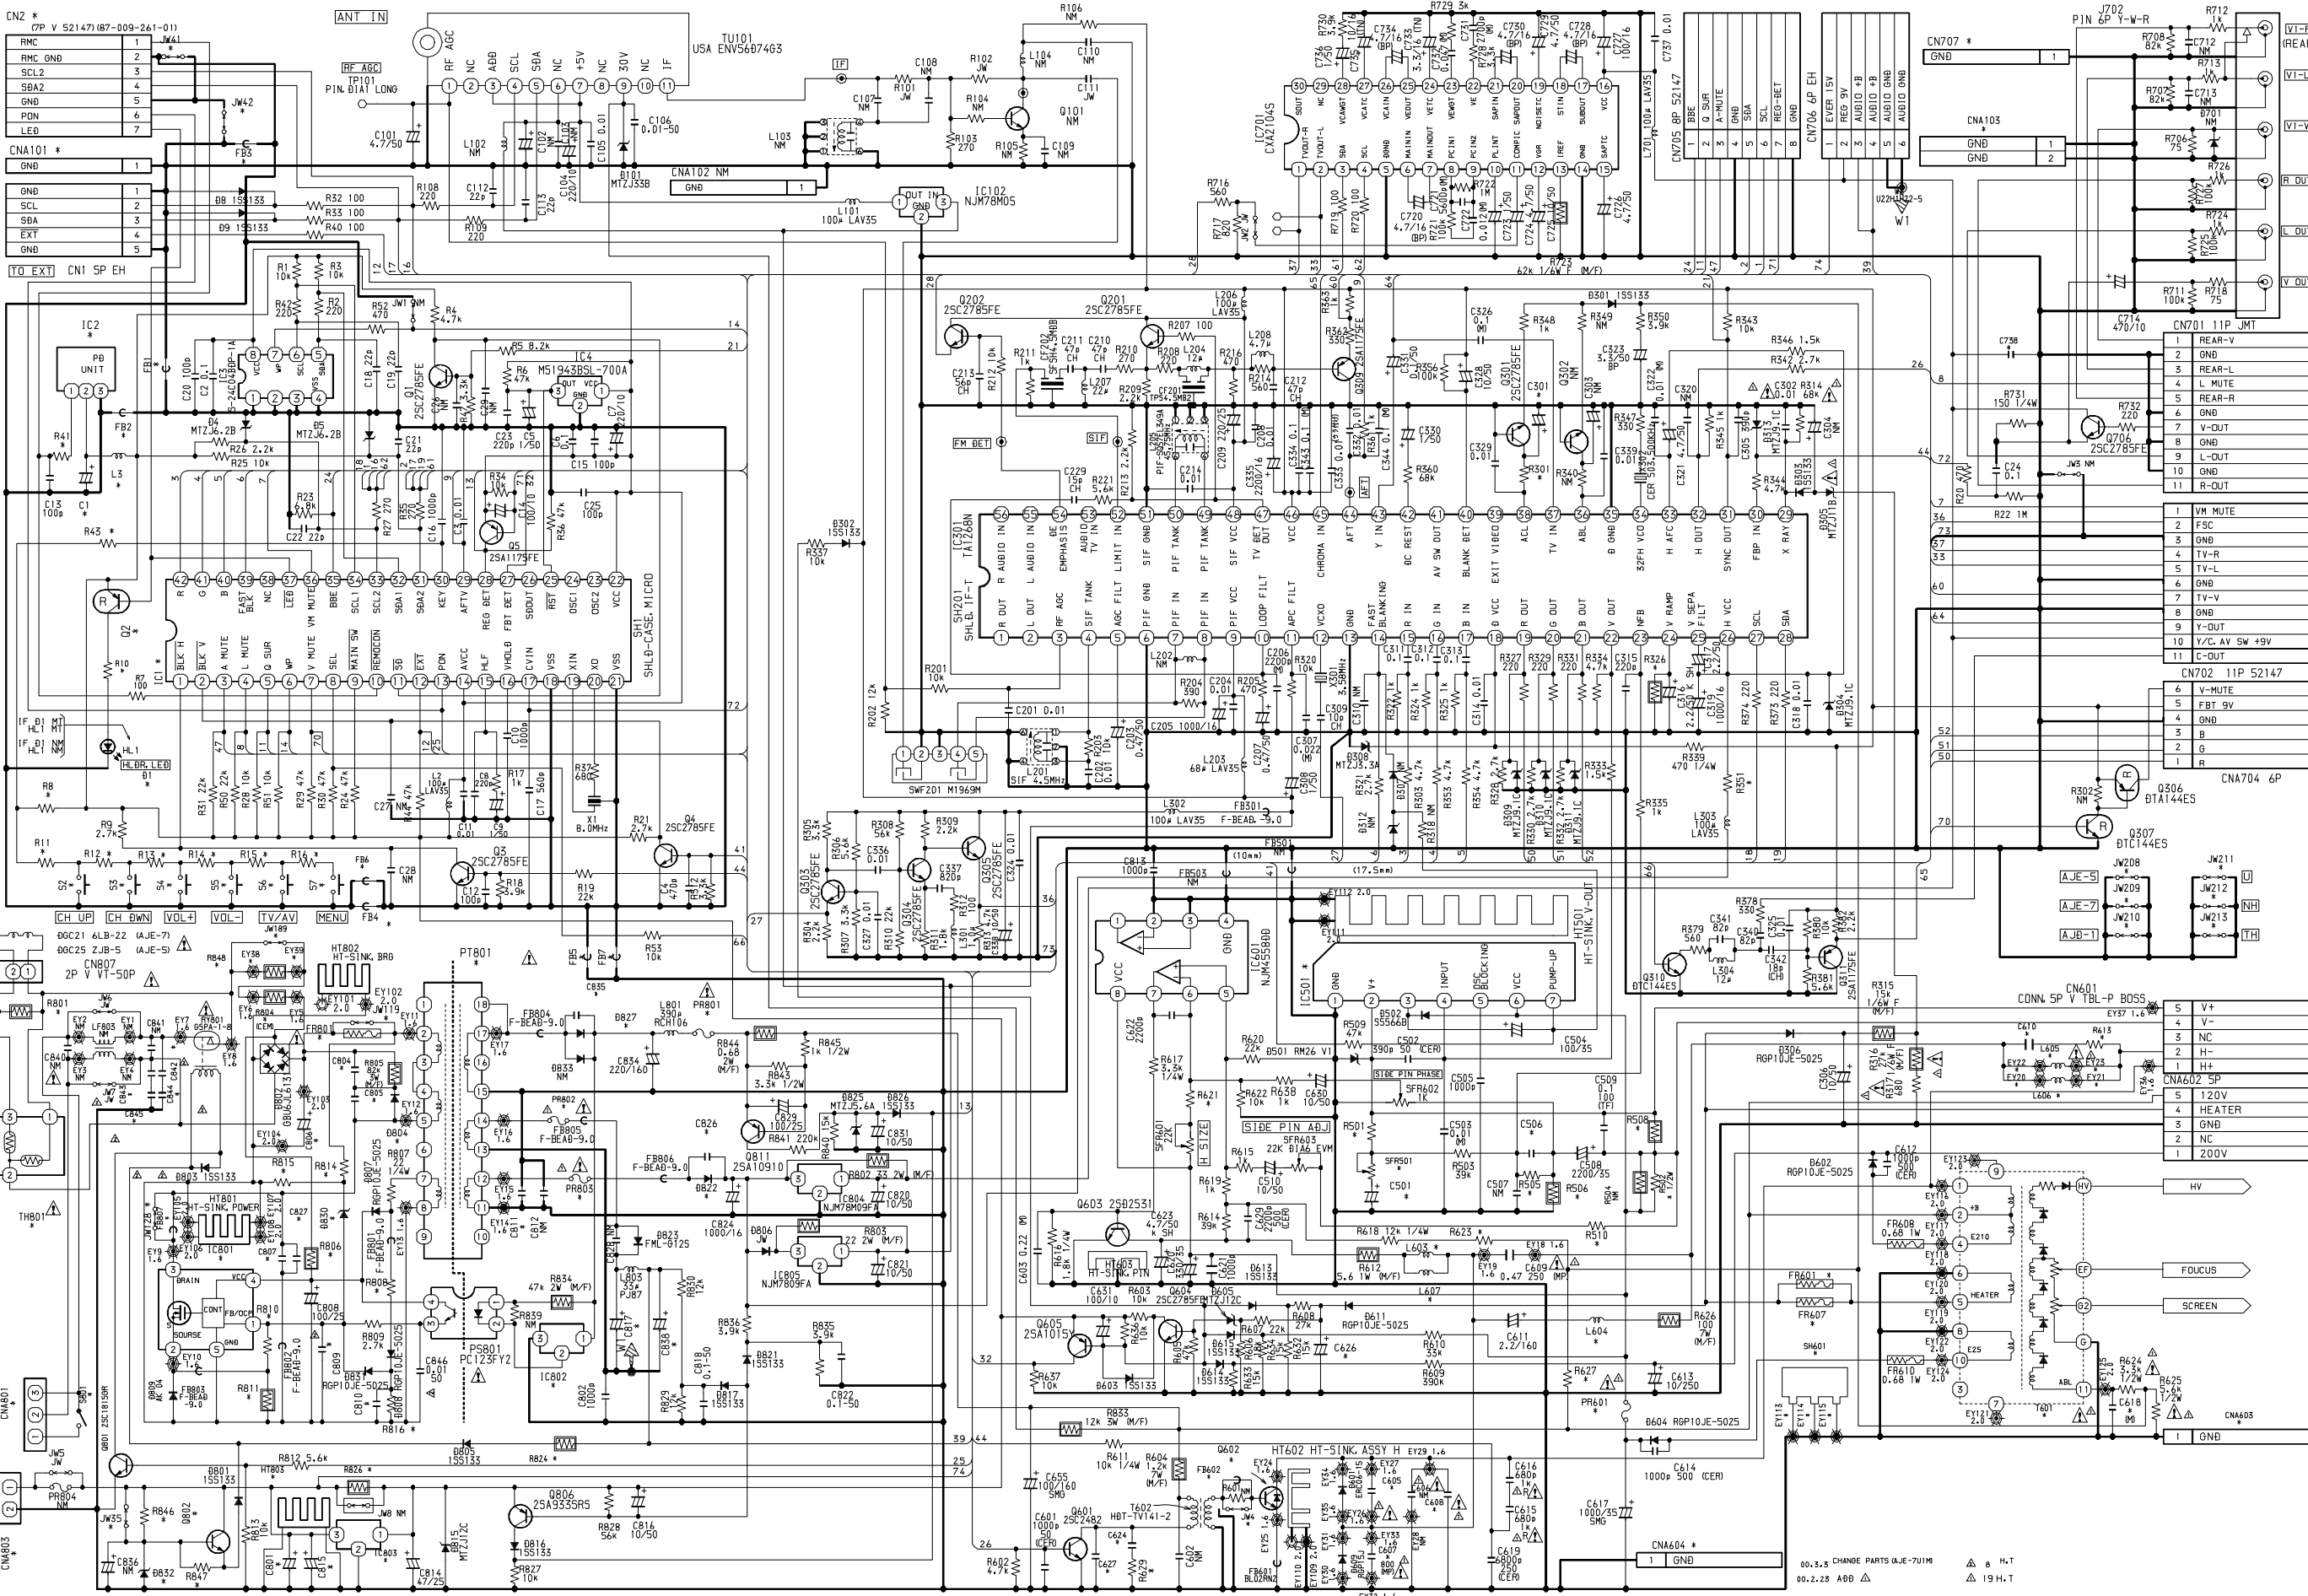


SCHEMATIC DIAGRAM - 2 (AUDIO)

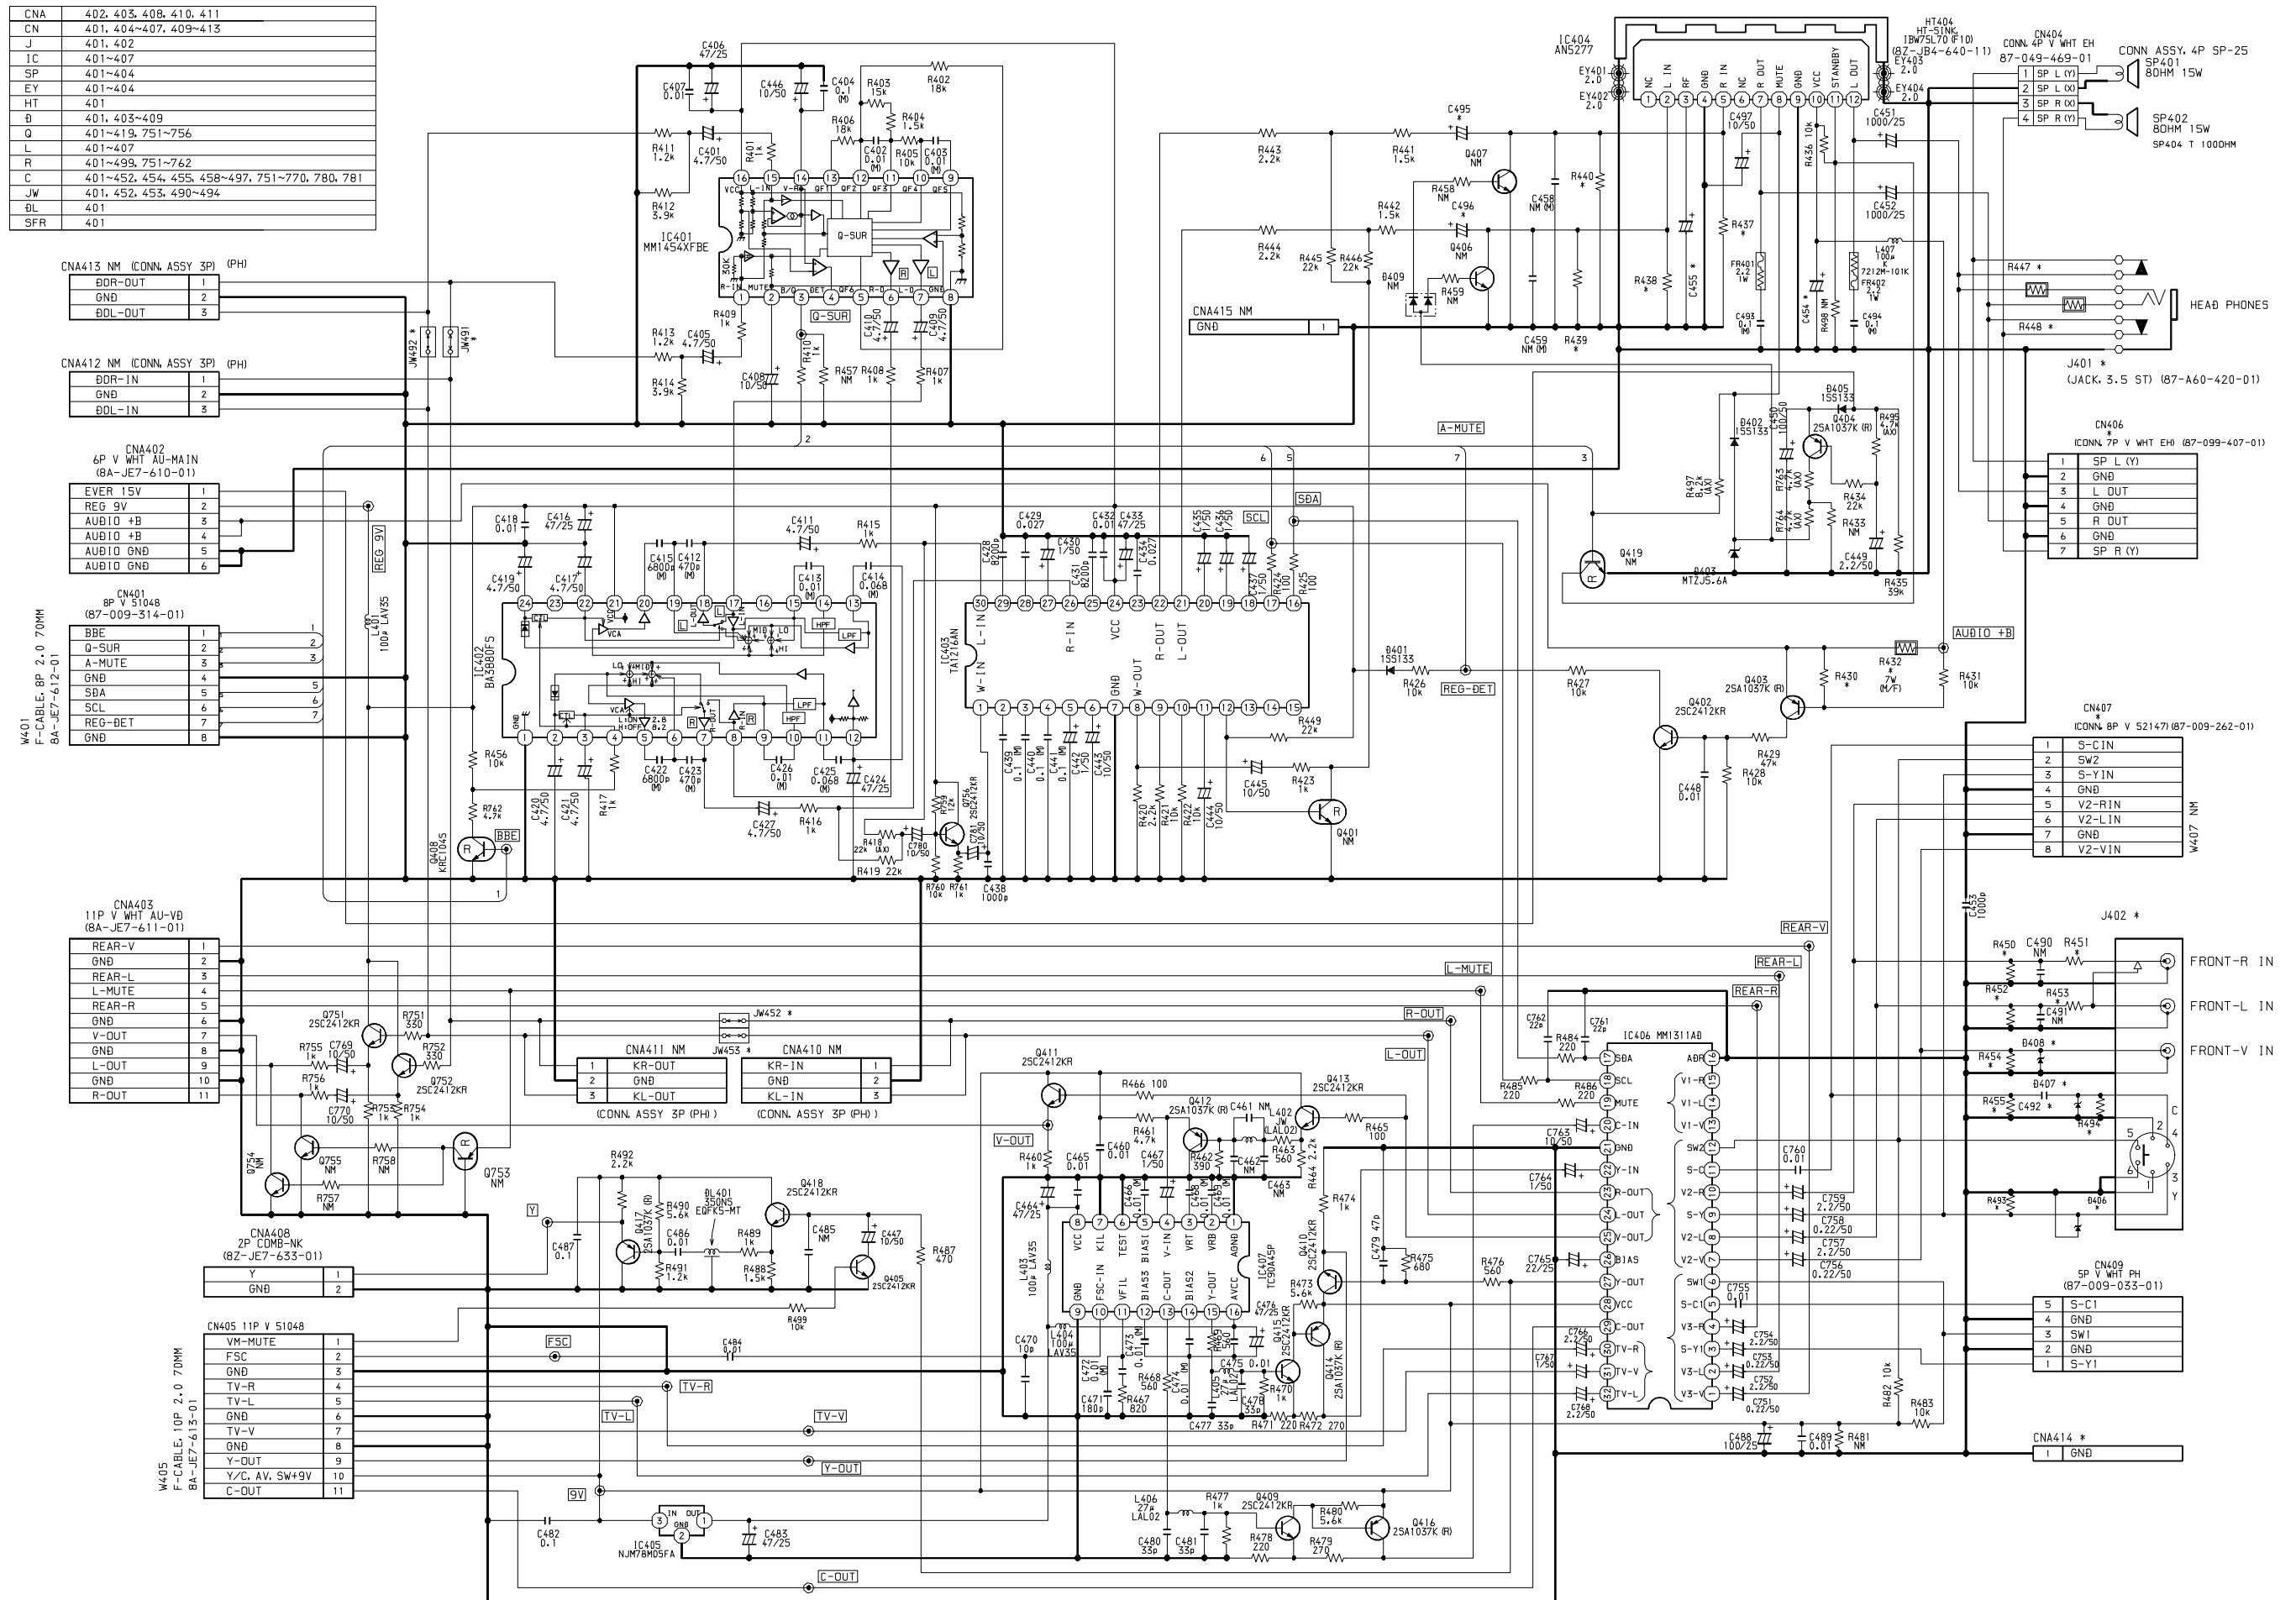


SCHEMATIC DIAGRAM - 3 (NK)

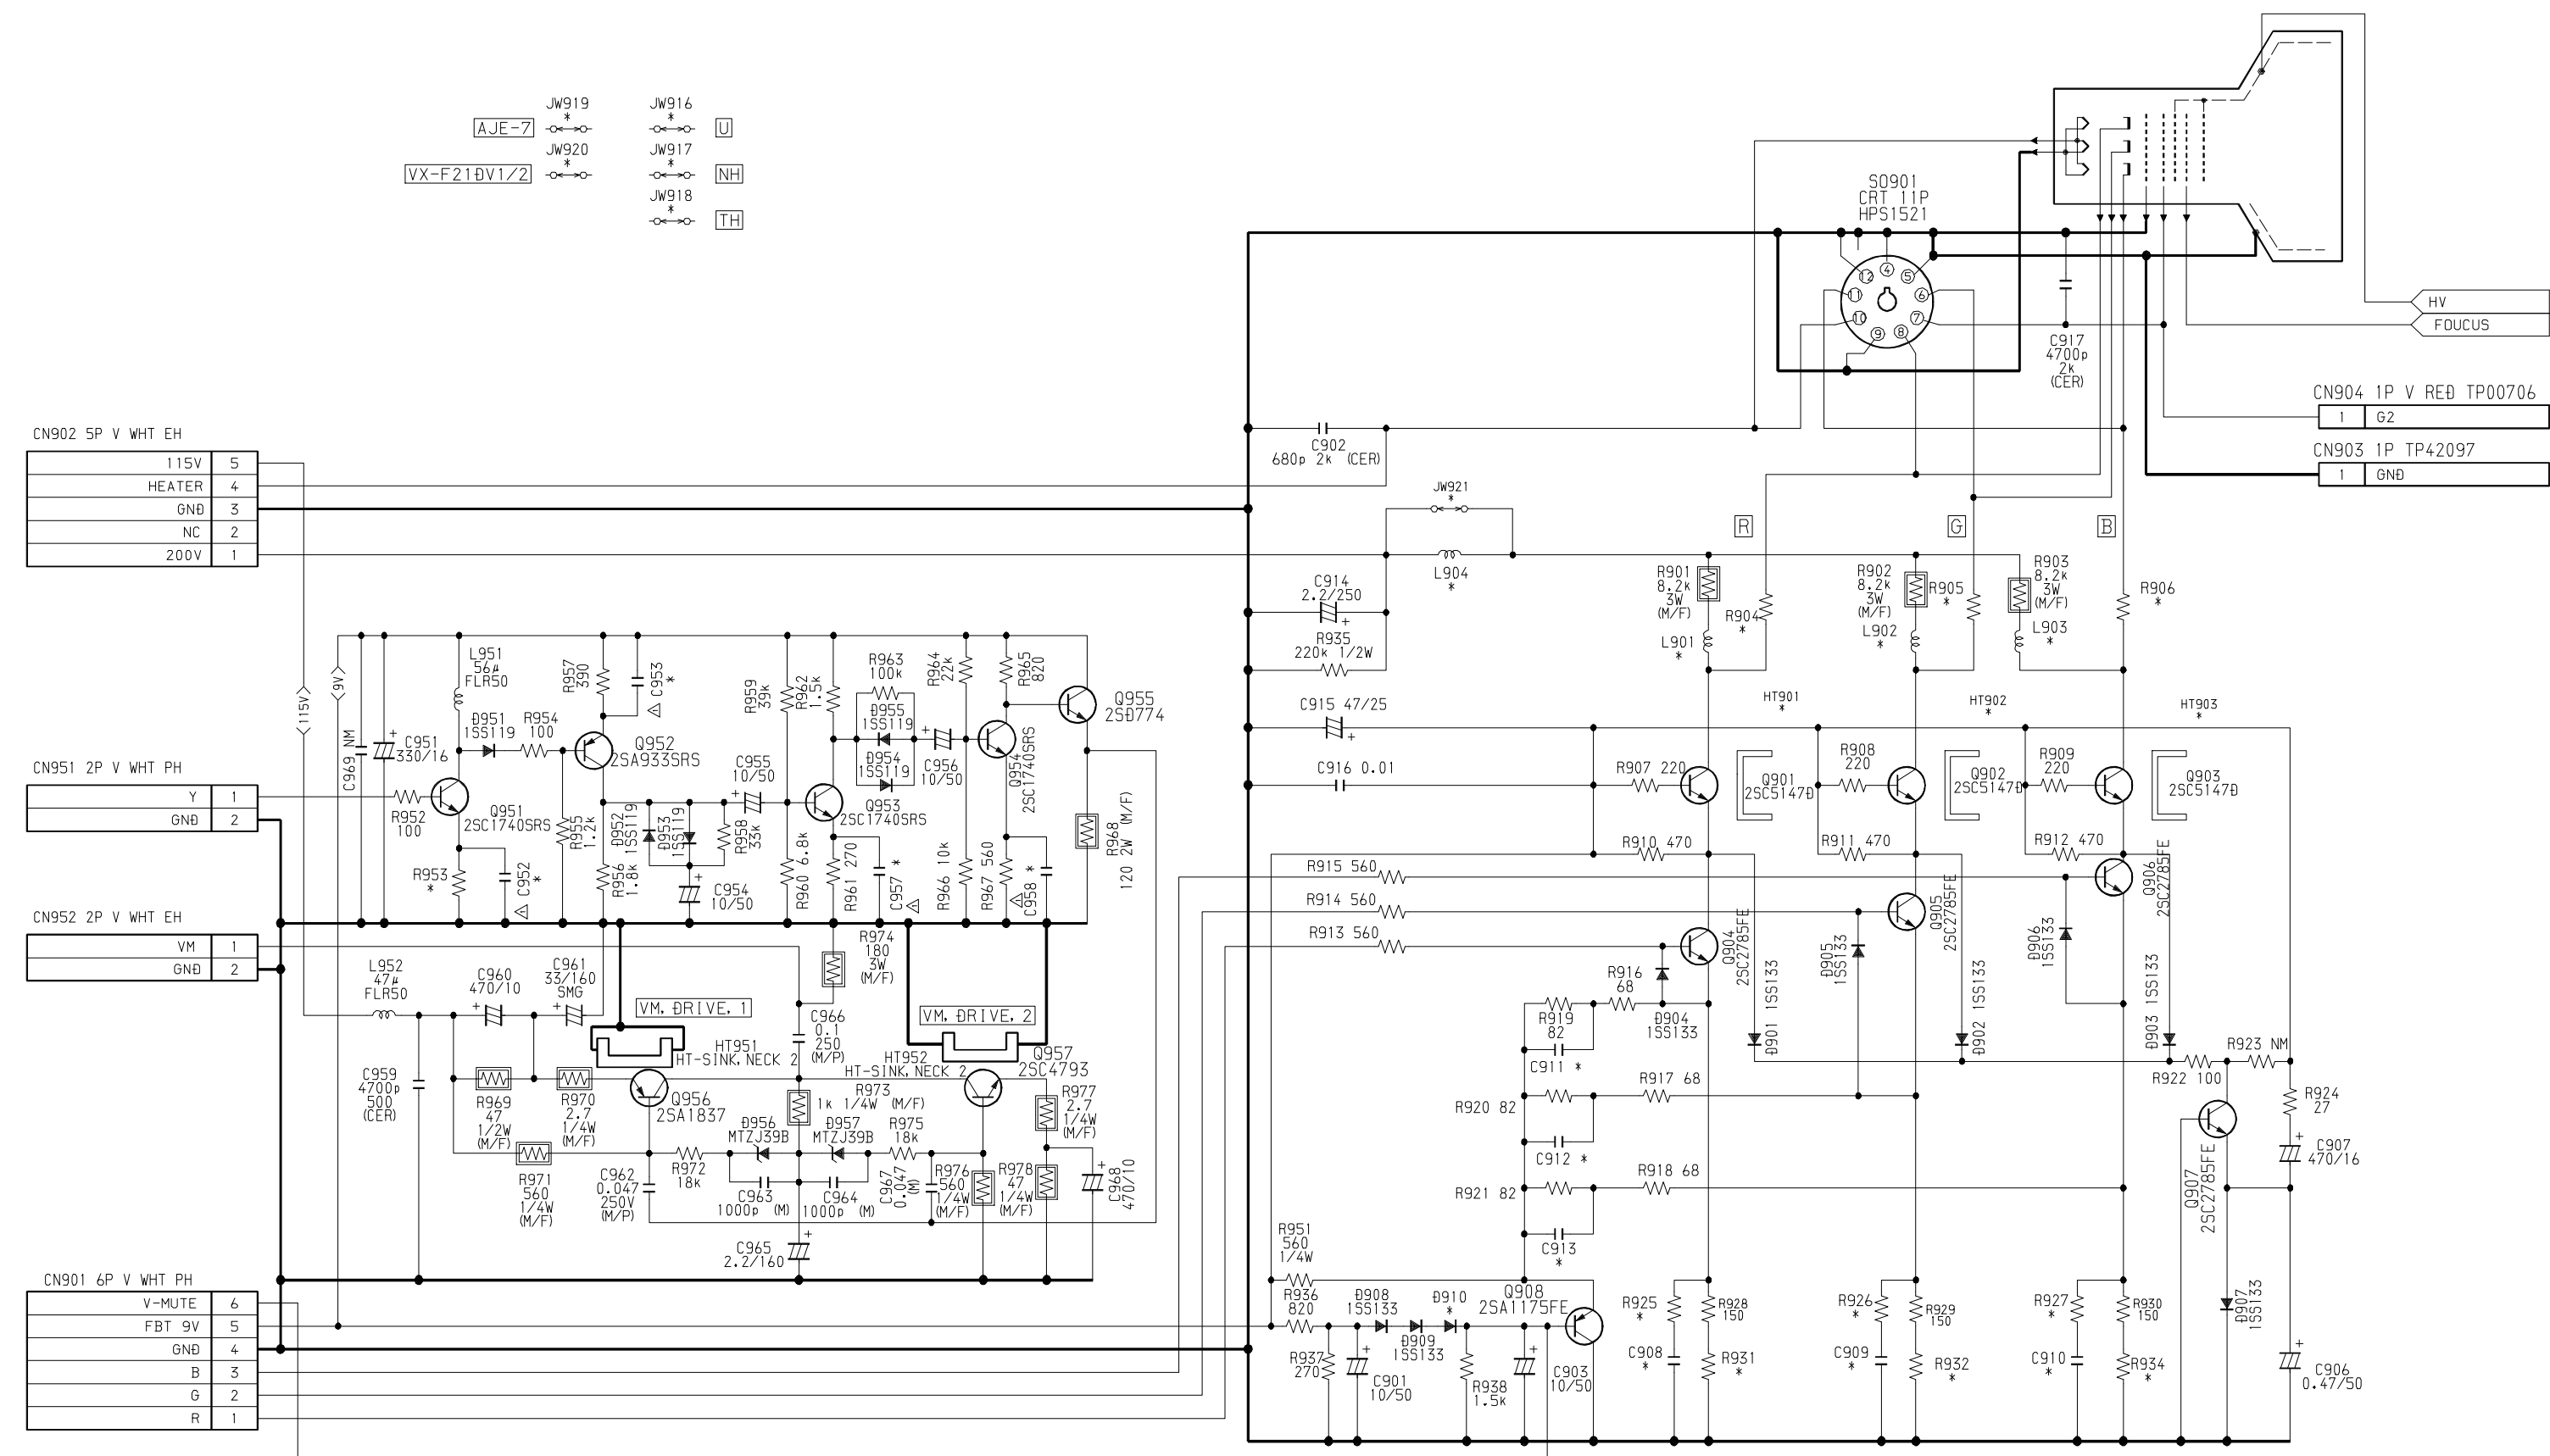

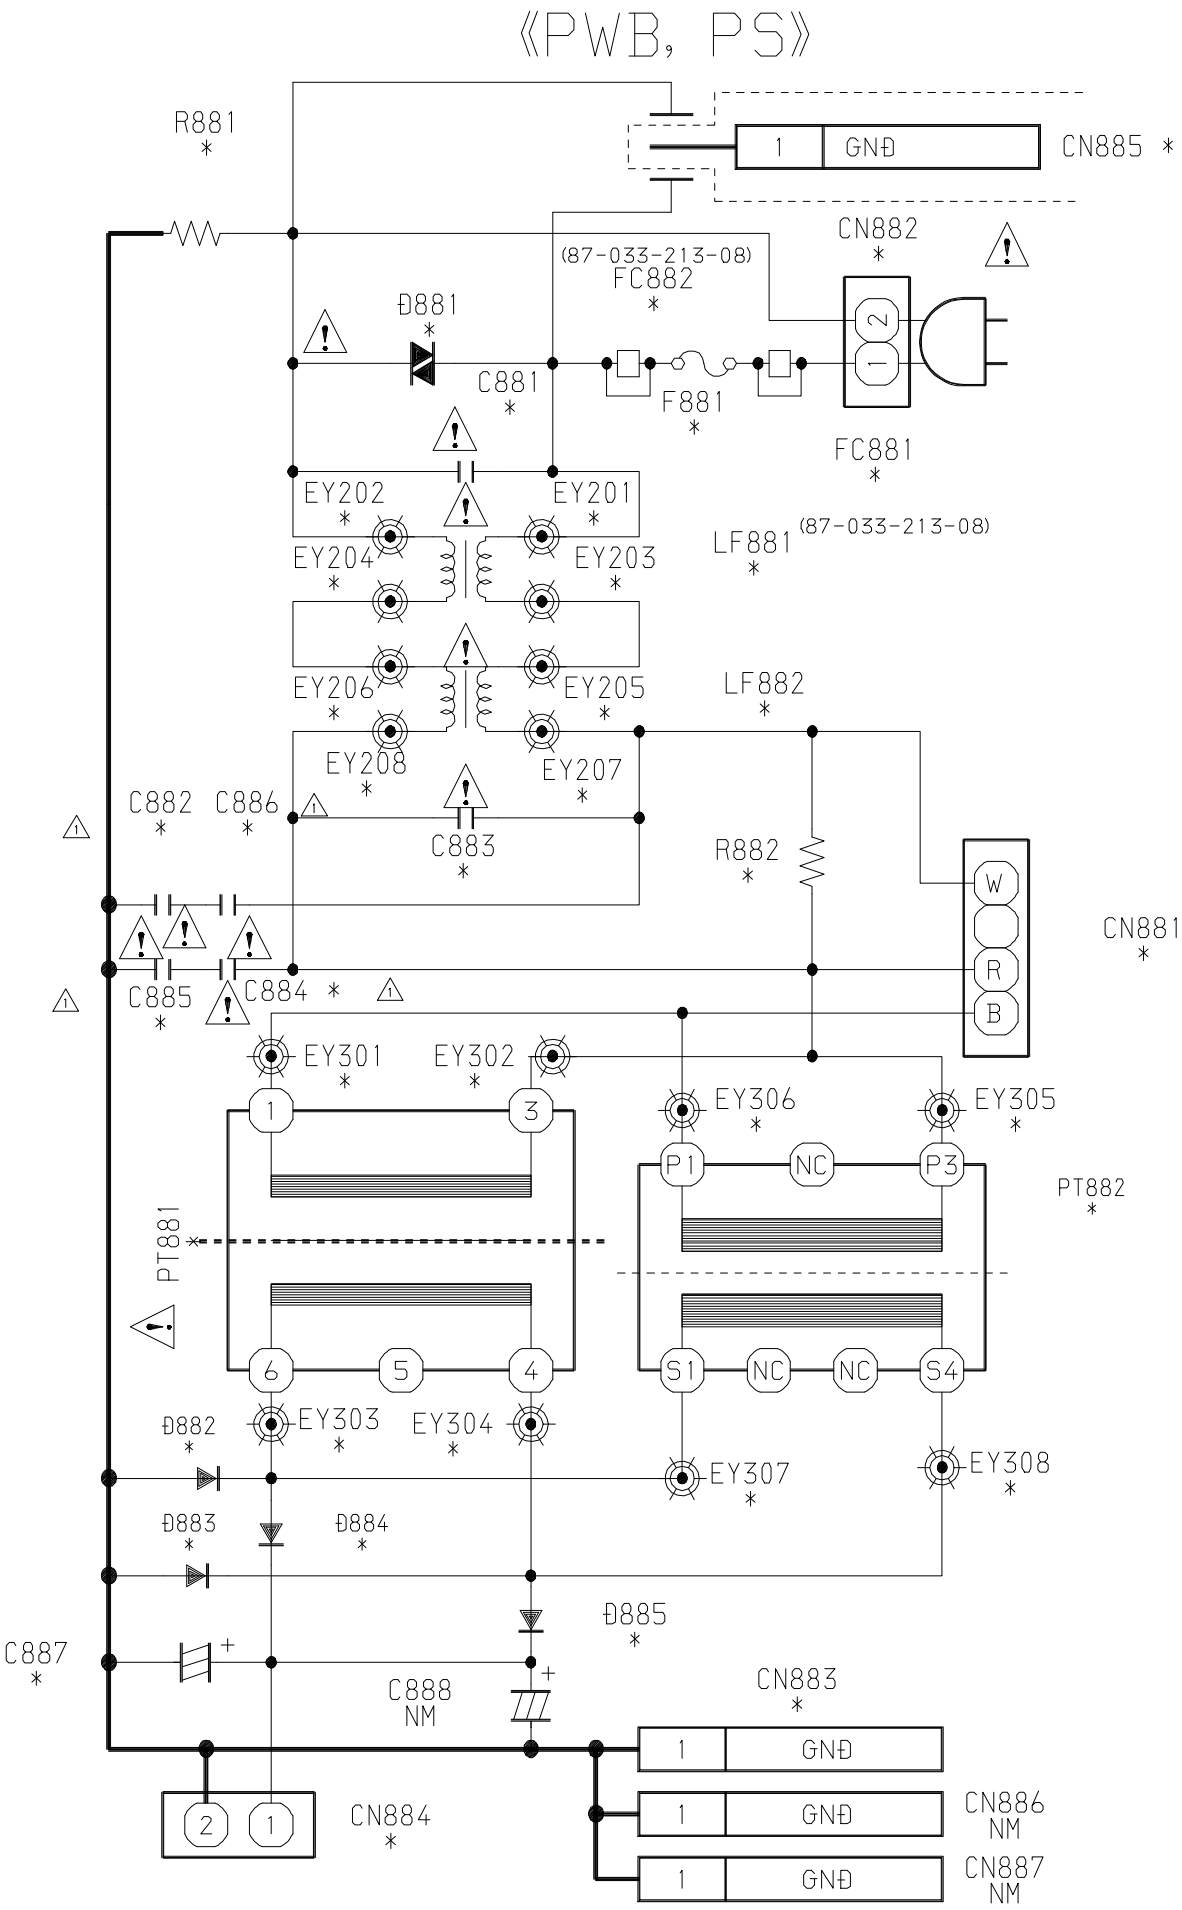

SCHEMATIC DIAGRAM - 5 (SJACK)

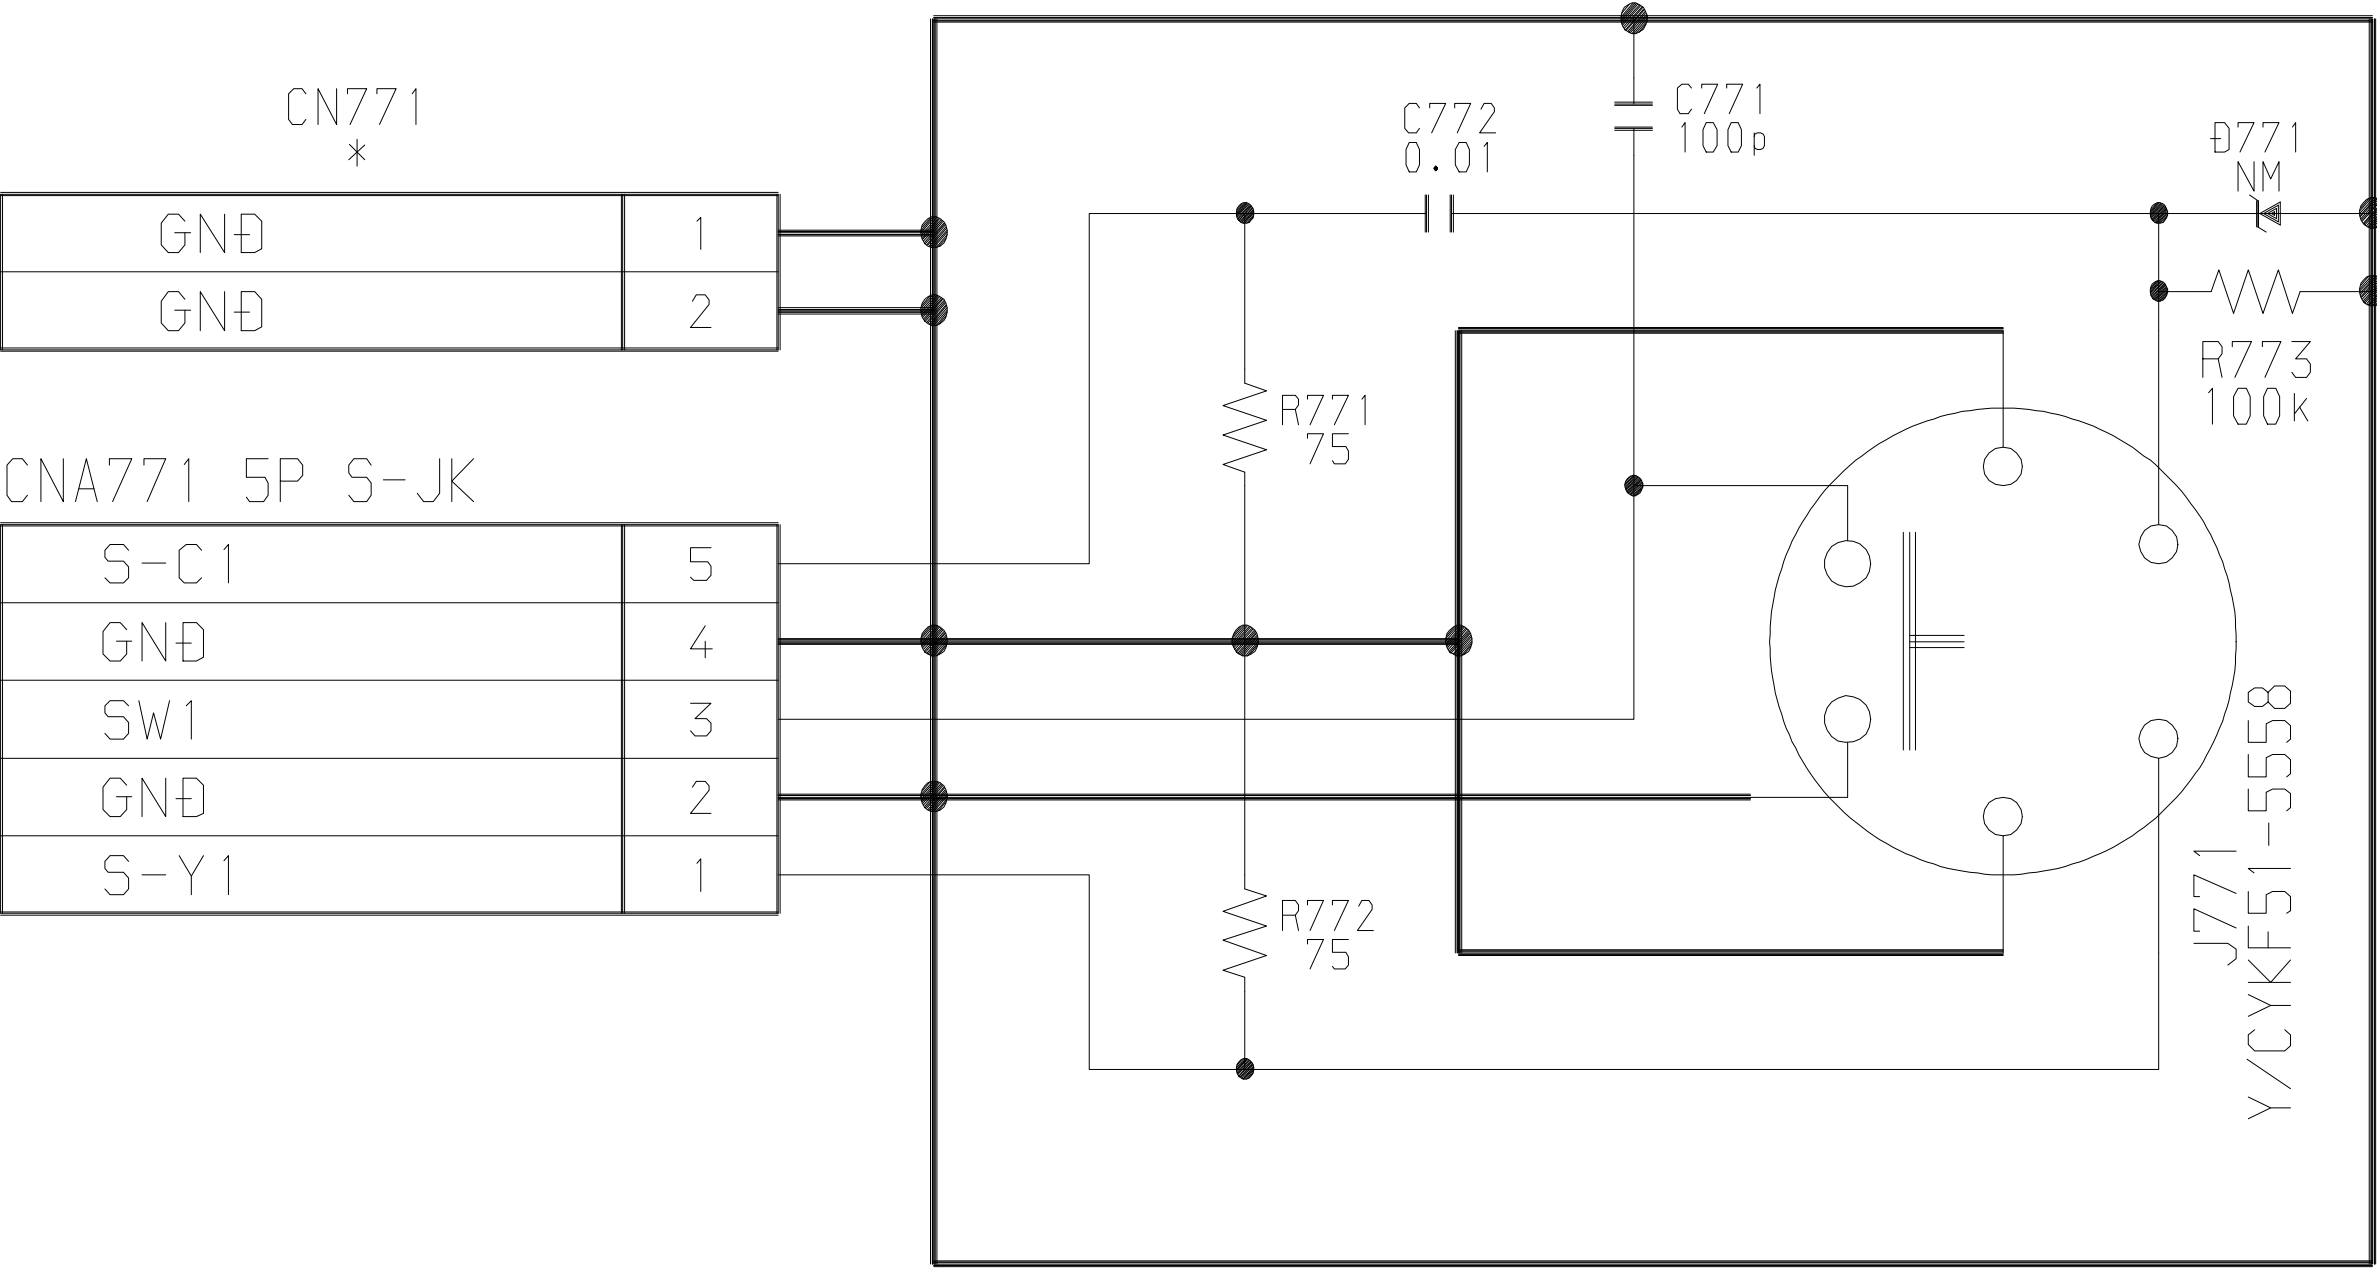

CNA	771
J	771
Đ	771, 772
R	771~773
C	771, 772

アイワ株式会社 〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 (代表)
AIWA CO.,LTD. 2-11, IKENOHATA 1-CHOME, TAITO-KU, TOKYO 110, JAPAN TEL:03 (3827) 3111